




Shandong Chik Bearing Co., Ltd.

70 mm x 125 mm x 24 mm NTN 6214ZZ deep groove ball bearings

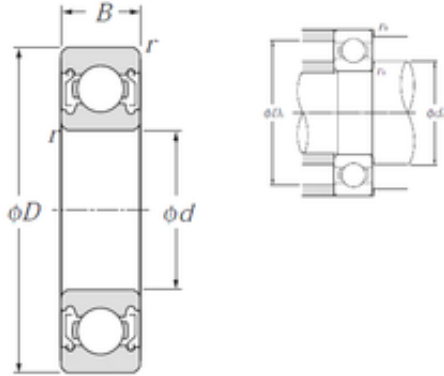

Bearing No. 6214ZZ

6214ZZ Bearing 2D drawings and 3D CAD models

Size	70x125x24 mm
Bore Diameter	70 mm
Outer Diameter	125 mm
Width	24 mm
d	70 mm
D	125 mm
B	24 mm
C	24 mm
rn	0,5 mm
r min.	1,5 mm
da min.	78 mm
da max	85 mm
Da max.	117 mm
ra max.	1,5 mm
Weight	1,07 Kg
Basic dynamic load rating (C)	62 kN
Basic static load rating (C0)	44 kN
(Grease) Lubrication Speed	5 100 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	1.098
EAN	4547359004960
Product Group	B00308



Shandong Chik Bearing Co., Ltd.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6214ZZ
Weight / LBS	2.346
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Bore	2.756 Inch 70 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
bore diameter:	70 mm
precision rating:	ISO Class 0



Shandong Chik Bearing Co., Ltd.

outside diameter:	125 mm
finish/coating:	Uncoated
overall width:	24 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	24 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	24 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	5100 rpm
internal clearance:	CN
fillet radius:	1.5 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	6000 RPM
dynamic load capacity:	62000 N
series:	62
static load capacity:	44000 N
manufacturer product page:	Click here