




Shandong Chik Bearing Co., Ltd.

30 mm x 62 mm x 20 mm NSK 2206 self aligning ball bearings

Bearing No. 2206

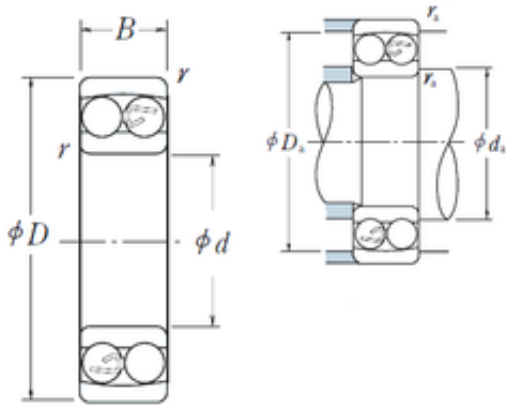

2206 Bearing 2D drawings and 3D CAD models

Size	30x62x20 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	20 mm
d	30 mm
D	62 mm
B	20 mm
C	20 mm
r min.	1 mm
da min.	35 mm
Da max.	57 mm
ra max.	1 mm
Weight	0,249 Kg
Basic dynamic load rating (C)	15,3 kN
Basic static load rating (C0)	4,55 kN
(Grease) Lubrication Speed	10 000 r/min
(Oil) Lubrication Speed	12 000 r/min
Calculation factor (e)	0,38
Calculation factor (Y0)	1,7
Calculation factor (Y2)	2,5
SRI	4.17
Y3	1.6
hidYobi	2206
LangID	1
PCD	46



Shandong Chik Bearing Co., Ltd.

D_	62
Y2	2.5
SREX	0
cyl count	14
B_	20
hidTable	ecat_NSSAB
Oil rpm	12000
SRE	0
Y0	1.7
mass	0.249
ra	1
GRS rpm	10000
SRIX	0.04
groove inner	38.048
D_a	57
SRIN	0
C0	4.55
groove outer	55.427
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	35
X2	0.65
e	0.38
yobi	2206
r	1
KBRG	1354
CAng	14.387
cyl dia	7.938