




Shandong Chik Bearing Co., Ltd.

22 mm x 56 mm x 16 mm NTN 63/22ZZ deep groove ball bearings

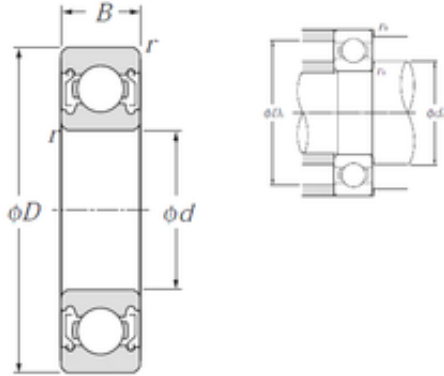

Bearing No. 63/22ZZ

63/22ZZ Bearing 2D drawings and 3D CAD models

Size	22x56x16 mm
Bore Diameter	22 mm
Outer Diameter	56 mm
Width	16 mm
d	22 mm
D	56 mm
B	16 mm
C	16 mm
rn	0,5 mm
r min.	1,1 mm
da min.	28,5 mm
da max	31 mm
Da max.	49,5 mm
ra max.	1 mm
Weight	0,176 Kg
Basic dynamic load rating (C)	18,4 kN
Basic static load rating (C0)	9,25 kN
(Grease) Lubrication Speed	13 000 r/min
Category	Single Row Ball Bearings
Inventory	1.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.178
EAN	4547359571875
Product Group	B00308



Shandong Chik Bearing Co., Ltd.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C3-Loose
Inch - Metric	Metric
Long Description	22MM Bore; 56MM Outside Diameter; 16MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	63/22ZZ/2A
Weight / LBS	0.388
Bore	0.866 Inch 22 Millimeter
Outside Diameter	2.205 Inch 56 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
bore diameter:	22 mm
precision rating:	ISO Class 0
outside diameter:	56 mm
finish/coating:	Uncoated
overall width:	16 mm
bearing material:	High Carbon Chrome Steel



Shandong Chik Bearing Co., Ltd.

bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	16 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	16 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	13000 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	11000 RPM
dynamic load capacity:	18400 N
series:	63
static load capacity:	9250 N
manufacturer product page:	Click here